

D&B 16-MULTI

A robust design allows the rig to cover a wide variety of drilling styles and depths whilst still allowing for practical mobilisation.

Designed to bridge the gap between medium depth and deep hole exploration, the 16-Multi is able to be track or truck mounted and is equipped for diamond coring, RC, and everything in between.

With 16t pullback, 6m rod capacity and maximum casing diameter of 10" this model is well equipped to cover all of your drilling needs.

STANDARD SPECIFICATIONS

MAIN WINCH	10,000kg
RETRACT FORCE	16,000kg
RETRACT SPEED	30m/min
PULL DOWN FORCE	8,000kg
PULL DOWN SPEED	35m/min
HEAD STROKE	7m
HP	180
ENGINE	HYAUNDAI D 6BT
ROTATION SPEED	1100 rpm


*DEPTH CAPABILITY

PWL (114.3mm)	Up to 300m
HWL (88.9mm)	Up to 500m
NWL (69.9mm)	Up to 1,000m
BWL (55.6mm)	Up to 1,500m

BASIC RIG DIMENSIONS

OA LENGTH	11.4M
OA WIDTH	2.2M
OA TRANSPORT HEIGHT	2.9M
HEIGHT (MAST RAISED VERTICALLY)	12M
DRY WEIGHT (DEPENDING)	10T

TRUCK OR
TRACK
MOUNTED

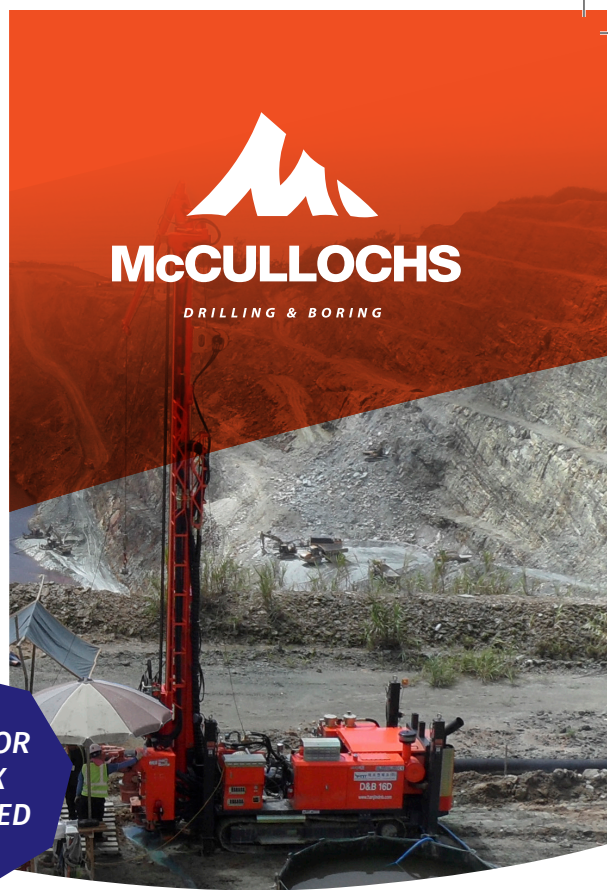

STANDARD EQUIPMENT

WATER INJECTION
180HP 6CYL HYUNDAI
1.9M 250KG EXTENDABLE
JIB CRANE
7M HEAD TRAVEL
WIRELINE WINCH
SELF-LOADING JACKS
WIRELESS REMOTE FOR
TRAVEL
RISK ASSESMENT
MANUAL BREAKOUT
TABLE BREAKOUT

OPTIONAL EXTRAS

300LPM MUD PUMP
AMERICAN TRIPLEX
PISTON PUMP
350/500 COMPRESSOR
RC KIT WITH CYCLONE
ROD LOADER
TRUCK MOUNTING

*Under normal drilling conditions

**DISCOVER OUR
CAPABILITIES**

Call: +61 3 5445 6900
Email: sales@mccullochs.com.au
Visit: mccullochsdrilling.com



McCULLOCHS
DRILLING & BORING

