

HANJIN 16M

A robust design allows the rig to cover a wide variety of drilling styles and depths whilst still allowing for practical mobilisation. Designed to bridge the gap between medium depth and deep hole exploration, the 16M is able to be track or truck mounted and is equipped for diamond coring, RC and everything in between.



Standard Specifications

Pull Back	16T
Pull Down	8T
Stroke	7m
Engine	Hyundai D6GA
Max. Spindle Speed	1100rpm
Main Winch Capacity	10T
Head Torque (Max.)	3,900Nm
Retract Speed	30m/min

Depth Capability

PWL (114.3mm)	up to 300m
HWL (88.9mm)	up to 500m
NWL (69.9mm)	up to 1,000m
BWL (55.6mm)	up to 1,500m

*under normal drilling conditions

Rig Dimensions

OA Length	11.4m
OA Width	2.2m
OA Transport Height	2.9m
Mast Raise Height	12m
Dry Weight	10T

*before modifications/extras

Standard Equipment

- Double Clamp Make/Break
- Wireless Remote - Tramming
- Dual Speed Rotation Head
- Wireline Winch
- FMC W11 Bean Pump
- Safety Cage with Interlock
- Hose Covering
- Steel Tracks
- Risk Assessment
- Self Loading Jack Legs
- Foot Clamp (P,H & N Jaws)
- Water Injection Pump
- 1.9M 250kg Extendable Jib

Optional Extras

- On Board Compressor
- Mud Pump Options
- Rod Loading System
- Water Injection Pump
- RC Kit
- SPT Hammer
- On Board Welder
- 60LPM Washdown Pump

FMC W11 MUD PUMP






WIRELESS REMOTE - TRAMMING




SELF LOADING JACK LEGS



Overall Rig Dimensions

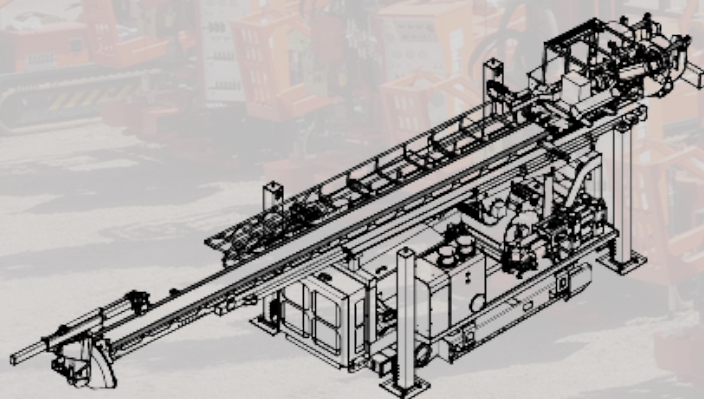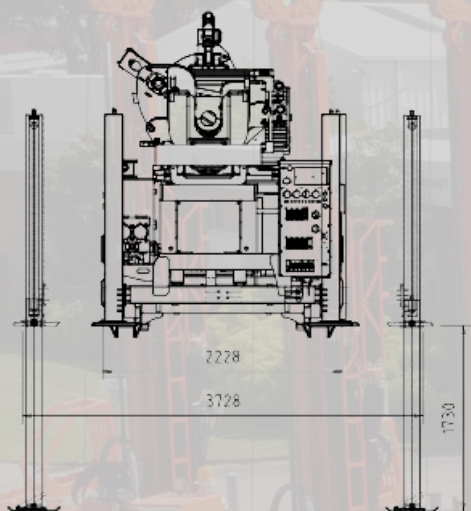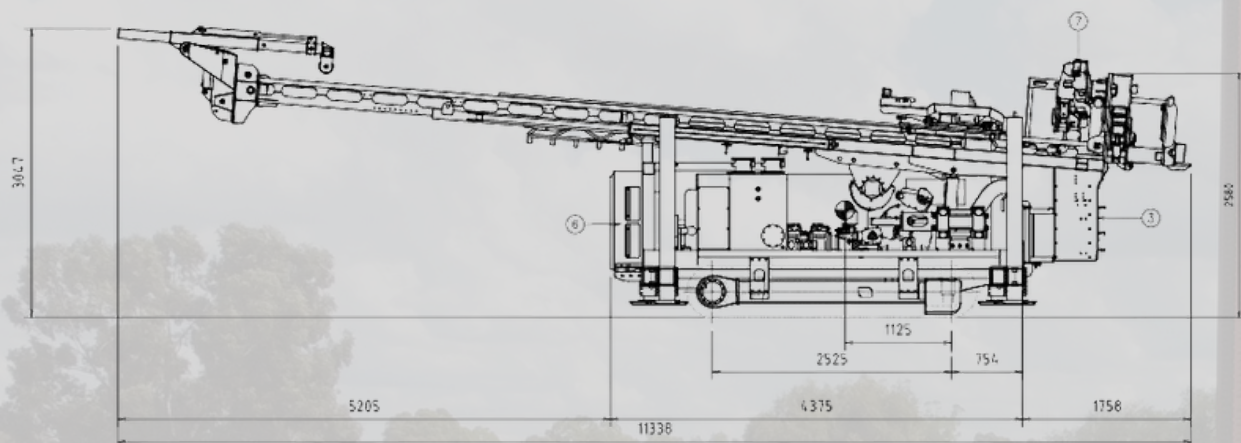

SO VIEW

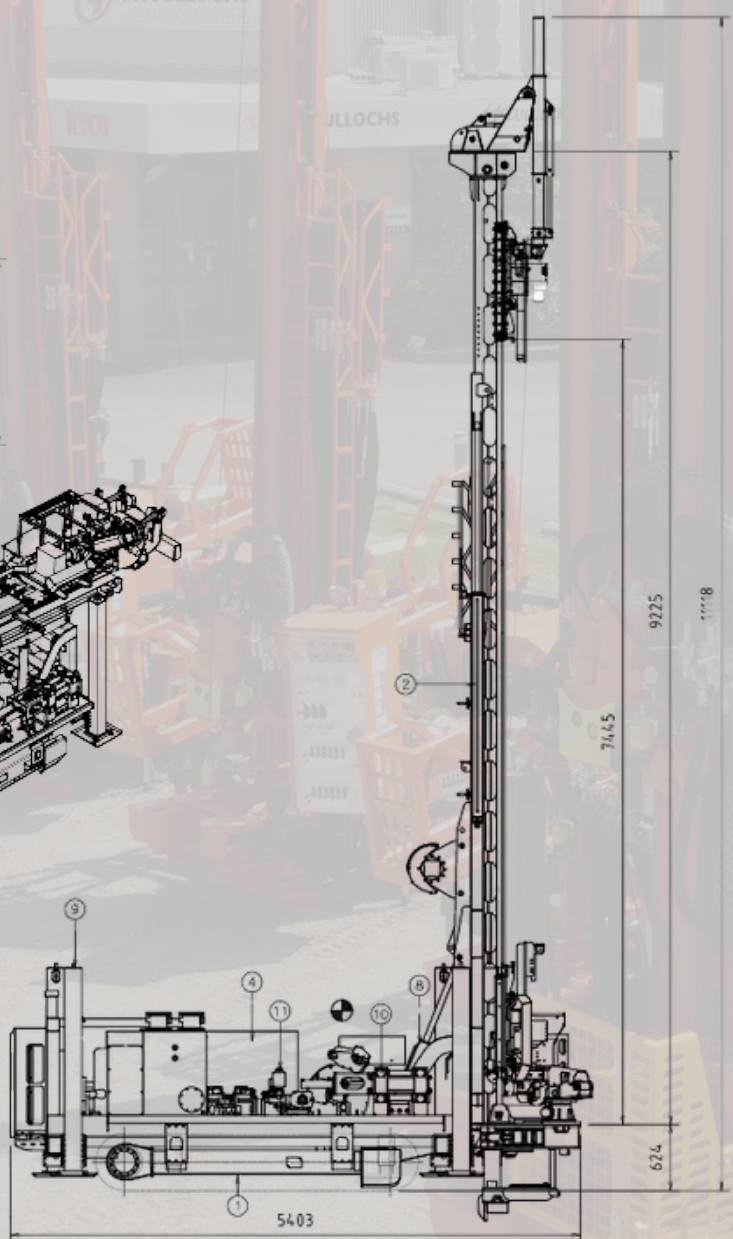

+61 3 5445 6900
sales@mccullochs.com.au
mccullochsdrilling.com.au