

# HANJIN 8TM COMP

Combining the proven performance of the Hanjin 8D and 8M, the 8-TM elevates its utility with a high-capacity on-board 200psi / 370CFM compressor. For maximum mobility across rugged terrain, the entire unit is mounted on a powerful 260HP 4WD Isuzu FTS 139-260 truck, providing a self-contained solution for the most demanding remote sites.



## Standard Specifications

|                     |                   |
|---------------------|-------------------|
| Pull Back           | 8T                |
| Pull Down           | 4T                |
| Stroke              | 3.5m              |
| Engine              | Hyundai D4BB      |
| Max. Spindle Speed  | 800rpm            |
| Main Winch Capacity | 3T                |
| Head Torque (Max.)  | 3530Nm            |
| Wireline Winch      | 500m OF 6mm       |
| Compressor          | 200PSI/370CFM     |
| Truck               | 260HP & 13.9T GVM |

## Standard Equipment

- Double Clamp Make/Break
- Dual Speed Rotation Head
- Wireline Winch
- 140LPM Variable Water Pump
- Safety Cage with Interlock
- Hydraulic hose Coverings
- Hydraulic Rod Rack
- Top Head Drive
- Third party Risk Assessment

## Depth Capability

|               |            |
|---------------|------------|
| PWL (114.3mm) | up to 80m  |
| HWL (88.9mm)  | up to 150m |
| NWL (69.9mm)  | up to 250m |
| 100-150mm     | up to 150m |

\*under normal drilling conditions

## Rig Dimensions

|                     |       |
|---------------------|-------|
| OA Length           | 5.78m |
| OA Width            | 2.2m  |
| OA Transport Height | 2.87m |
| Dry Weight          | 4.4T  |

\*before modifications/extras

## Optional Extras

- Hydraulic SPT Hammer
- RC System
- Tool Box
- Mono Pump Options
- Welder
- Compressor options

140LPM WATER INJECTION PUMP






DOUBLE CLAMP MAKE/BREAK



COMPRESSOR



## Overall Rig Dimensions

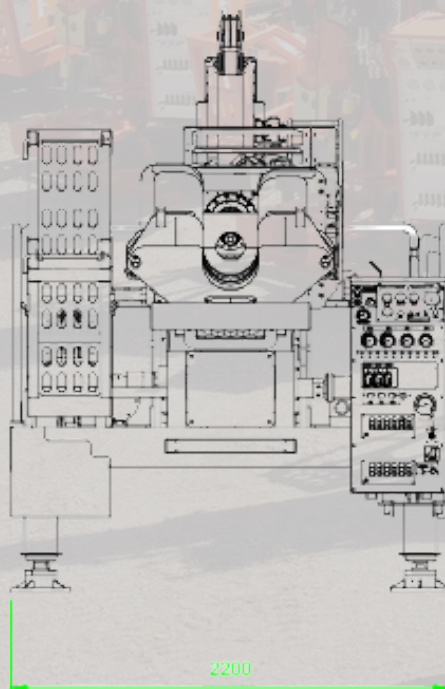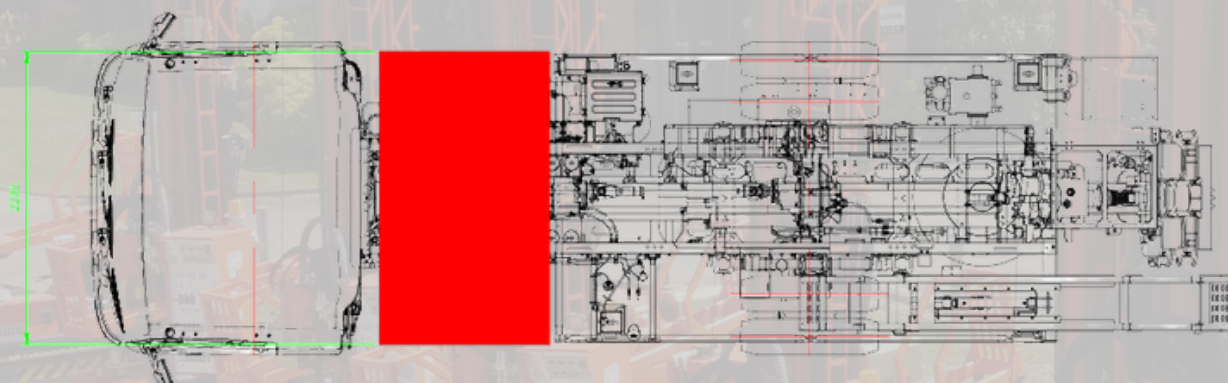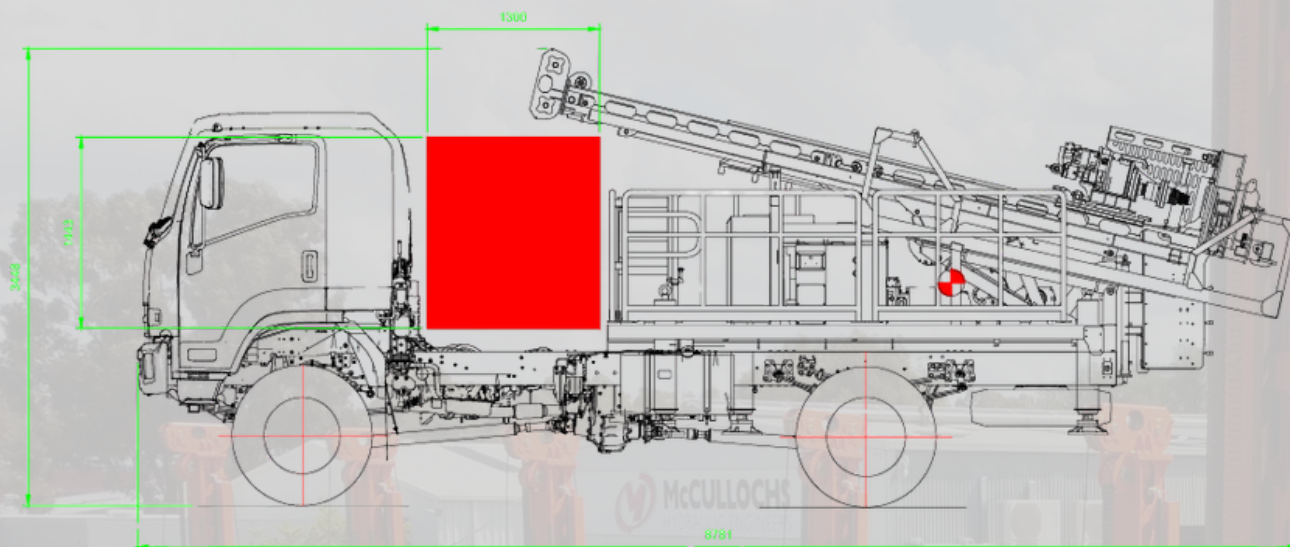

+61 3 5445 6900  
sales@mccullochs.com.au  
mccullochsdrilling.com.au