

HANJIN 30M

A big brother of the 16M, this rig is right at home in Australian exploration drilling. It drills deeper holes and larger diameters within it's capabilities, this is all possible whilst still being mounted on a smaller footprint than the 35M. The 30M has been a proven performance across the world and is very capable!



Standard Specifications

Pull Back	30T
Pull Down	18T
Stroke	7m
Engine	Hyundai DL08
Max. Spindle Speed	1100rpm
Main Winch Capacity	17T
Head Torque (Max.)	9,800Nm
Retract Speed	30m/min

Depth Capability

PWL (114.3mm)	up to 500m
HWL (88.9mm)	up to 1,000m
NWL (69.9mm)	up to 1,800m
BWL (55.6mm)	up to 2,250m

*under normal drilling conditions

Rig Dimensions

OA Length	11.5m
OA Width	2.2m
OA Transport Height	2.6m
Mast Raise Height	11.5m
Dry Weight	14T

*before modifications/extras

Standard Equipment

- Double Clamp Make/Break
- Wireless Remote - Tramming
- Dual Speed Rotation Head
- Wireline Winch
- FMC W11 Bean Pump
- Safety Cage with Interlock
- Hose Covering
- Steel Tracks
- Risk Assessment
- Self Loading Jack Legs
- Foot Clamp (P,H & N Jaws)
- Water Injection Pump
- 1.9M 250kg Extendable Jib
- Truck or Track mounted

Optional Extras

- On Board Compressor
- Mud Pump Options
- Rod Loading System
- Water Injection Pump
- RC Kit
- SPT Hammer
- On Board Welder
- 60LPM Washdown Pump

FMC W11 MUD PUMP




WIRELESS REMOTE - TRAMMING



SELF LOADING JACK LEGS



Overall Rig Dimensions

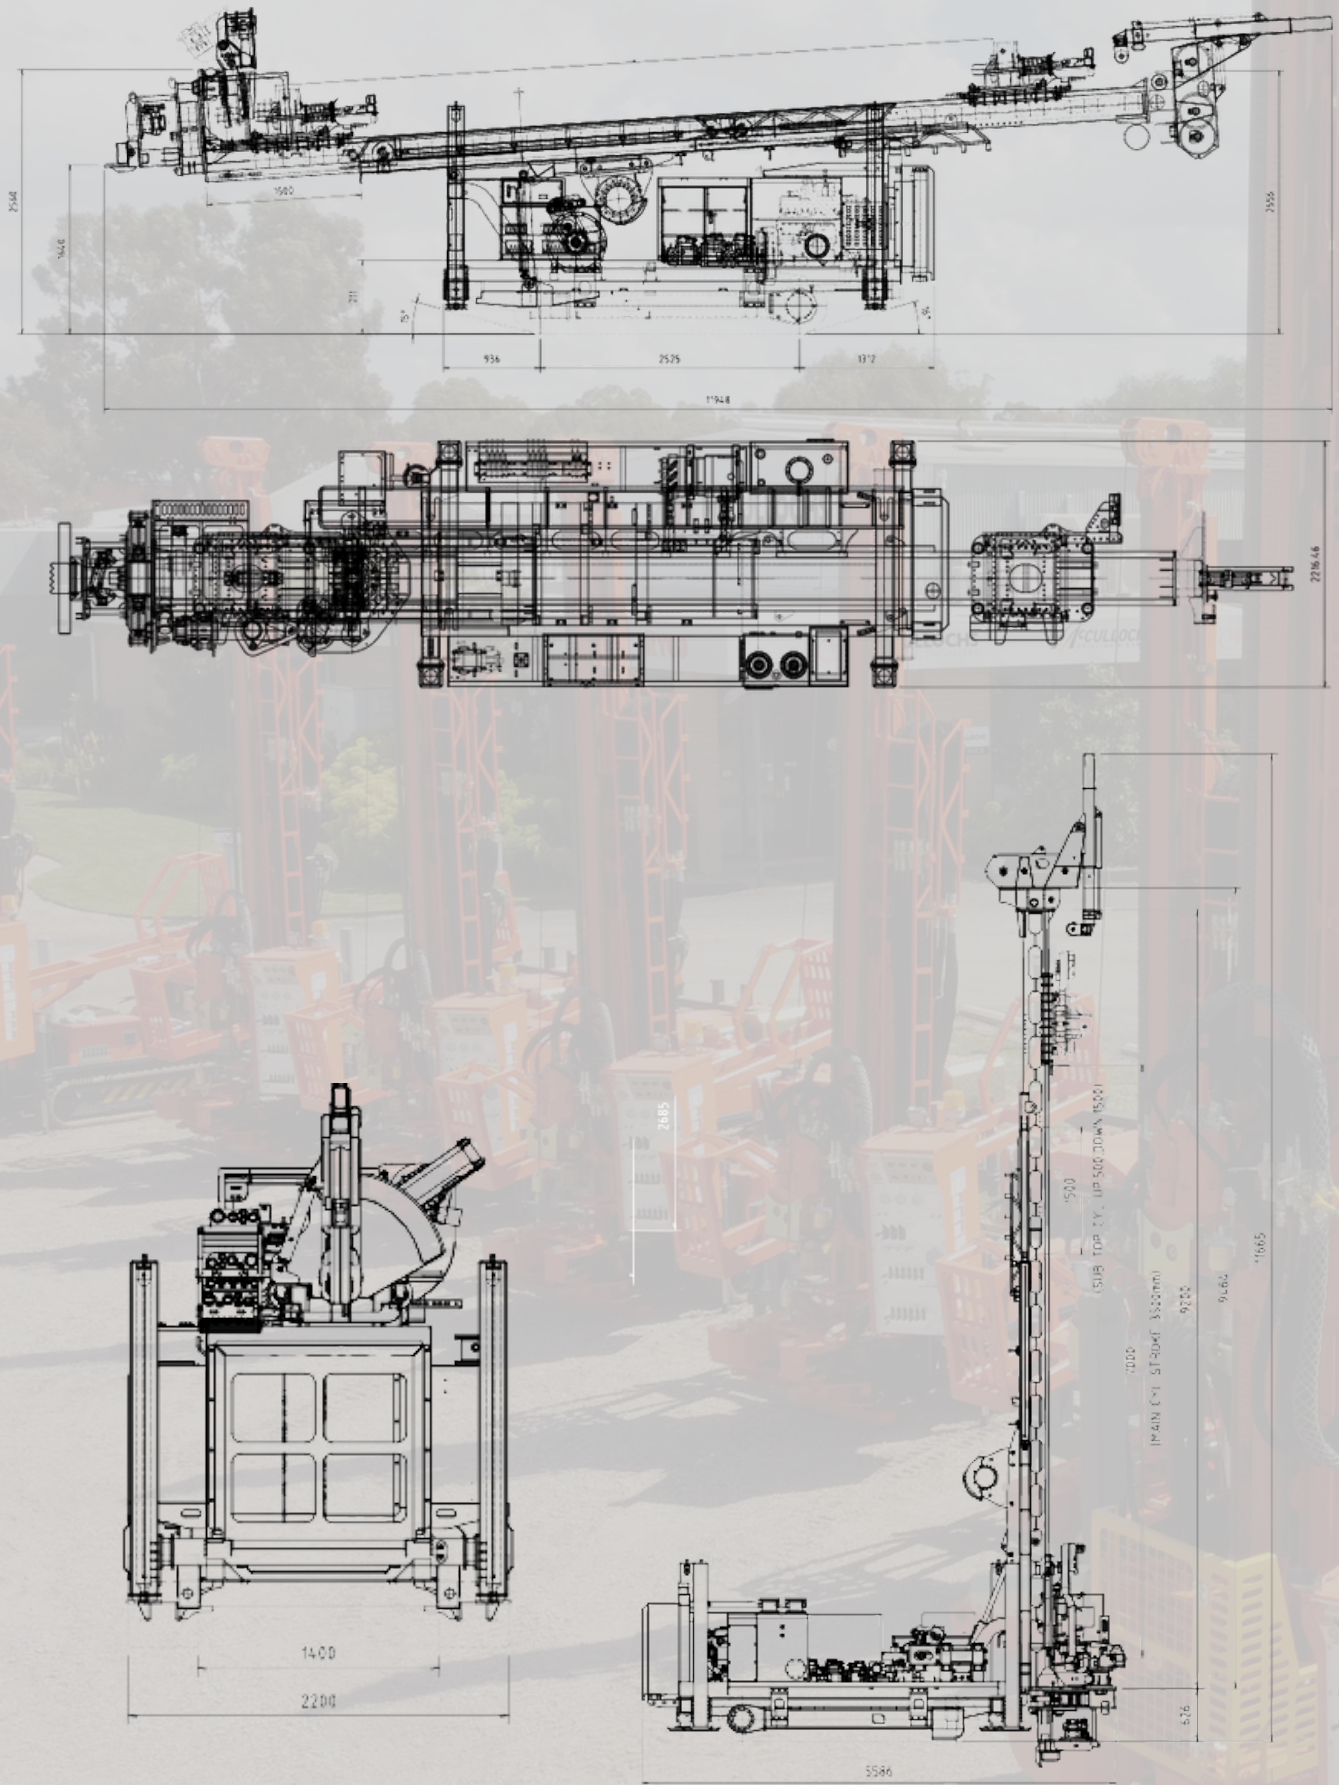

+61 3 5445 6900
sales@mccullochs.com.au
mccullochsdrilling.com.au