D&B 8-TM COMP

The 8-TM is a multipurpose drill rig, designed for shallow mineral exploration, geotechnical, water well drilling and now RC drilling.


Everything the Hanjin 8D & 8M has to offer but with an on board 200psi 370CFM capability compressor and a 260HP 4WD Isuzu FTS 139-260 Truck

STANDARD SPECIFICATIONS

MAX. PULL BACK	8000KG
RETRACT SPEED	25 M/MIN
PULL DOWN SPEED	30M/MIN
WORKING TABLE DIA.	250MM
ENGINE CAPACITY	40KW @ 1800RPM
MAX. SPINDLE SPEED	800RPM
PUMP OUTPUT	140 LPM @ 30 BAR
MAIN WINCH CAPACITY	3000KG
PULL-DOWN	4000KG
PULL-DOWN STROKE	
	4000KG
STROKE	4000KG 3.5M
STROKE HEAD TORQUE (MAX.)	4000KG 3.5M 3530NM
STROKE HEAD TORQUE (MAX.) WIRELINE CAPACITY	4000KG 3.5M 3530NM 500M OF 6MM

*DEPTH CAPABILITY

PWL (114.3mm)	Up to 80M
HWL (88.9mm)	Up to 150M
NWL (69.9mm)	Up to 250M
100-150MM DIA	Up to 150M

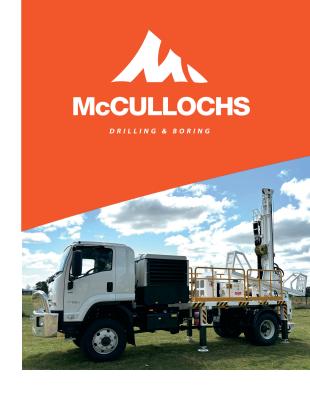

STANDARD EQUIPMENT

WIRELINE WINCH
HYUNDAI D4BB DIESEL ENGINE
TOP HEAD DRIVE
HYDRAULICALLY
OPERATED ROD BASKET
ROD GUARD WITH INTERLOCK
HOSE COVERING
RISK ASSESMENT
MAST EXTENSION
140LPM WATER INJECTION PUMP
ROD RACK WITH DUMP
MAKE/BREAK DOUBLE CLAMP
ON BOARD AIR 200PSI/370CFM

OPTIONAL EXTRAS

WELDER
HYDRAULIC SPT HAMMER
HIGH TORQUE HEAD
CONVERSION AVAILABLE
RC SYSTEM
TOOL BOX
WATER PUMP OPTIONS (L09 ETC)

*Under normal drilling conditions







