

# HANJIN 10D

Specifically designed to bridge the gap between geotechnical and exploration drilling. With a top head drive, 3.8m stroke and a collapsible top half of the mast, it's a compact unit that won't look out of place on a mineral or geotechnical job.



## Standard Specifications

|                     |              |
|---------------------|--------------|
| Pull Back           | 10T          |
| Pull Down           | 6T           |
| Stroke              | 3.8m         |
| Engine              | Hyundai D4DA |
| Max. Spindle Speed  | 800rpm       |
| Main Winch Capacity | 5T           |
| Head Torque (Max.)  | 4,120Nm      |
| Winch Pull          | 6m           |

## Standard Equipment

- Double Clamp Make/Break
- Wireless Remote - Trimming
- Dual Speed Rotation Head
- Wireline Winch
- FMC W11 Bean Pump
- Collapsible Mast
- Safety Cage with Interlock
- Hose Covering
- Steel Tracks
- Table Clamp 10" Diameter
- Risk Assessment
- Self Loading Jack Legs
- Foot Clamp (P,H & N Jaws)
- 60LPM Washdown Pump

## Depth Capability

|               |            |
|---------------|------------|
| PWL (114.3mm) | up to 100m |
| HWL (88.9mm)  | up to 200m |
| NWL (69.9mm)  | up to 500m |
| BWL (55.6mm)  | up to 750m |

\*under normal drilling conditions

## Rig Dimensions

|                     |      |
|---------------------|------|
| OA Length           | 5.5m |
| OA Width            | 2m   |
| OA Transport Height | 2.3m |
| Mast Raise Height   | 5.8m |
| Dry Weight          | 5.8T |

\*before modifications/extras


## Optional Extras

- On Board Compressor
- Mud Pump Options
- Rod Loading System
- Water Injection Pump
- RC Kit
- SPT Hammer
- On Board Welder

### FOLDABLE MAST EXTENSION



### WIRELESS REMOTE - TRIMMING

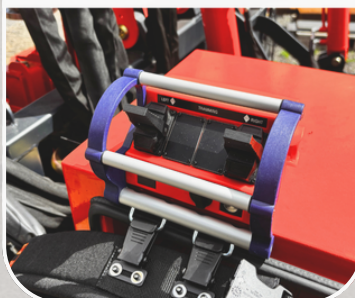


### DOUBLE CLAMP MAKE/BREAK





## Overall Rig Dimensions

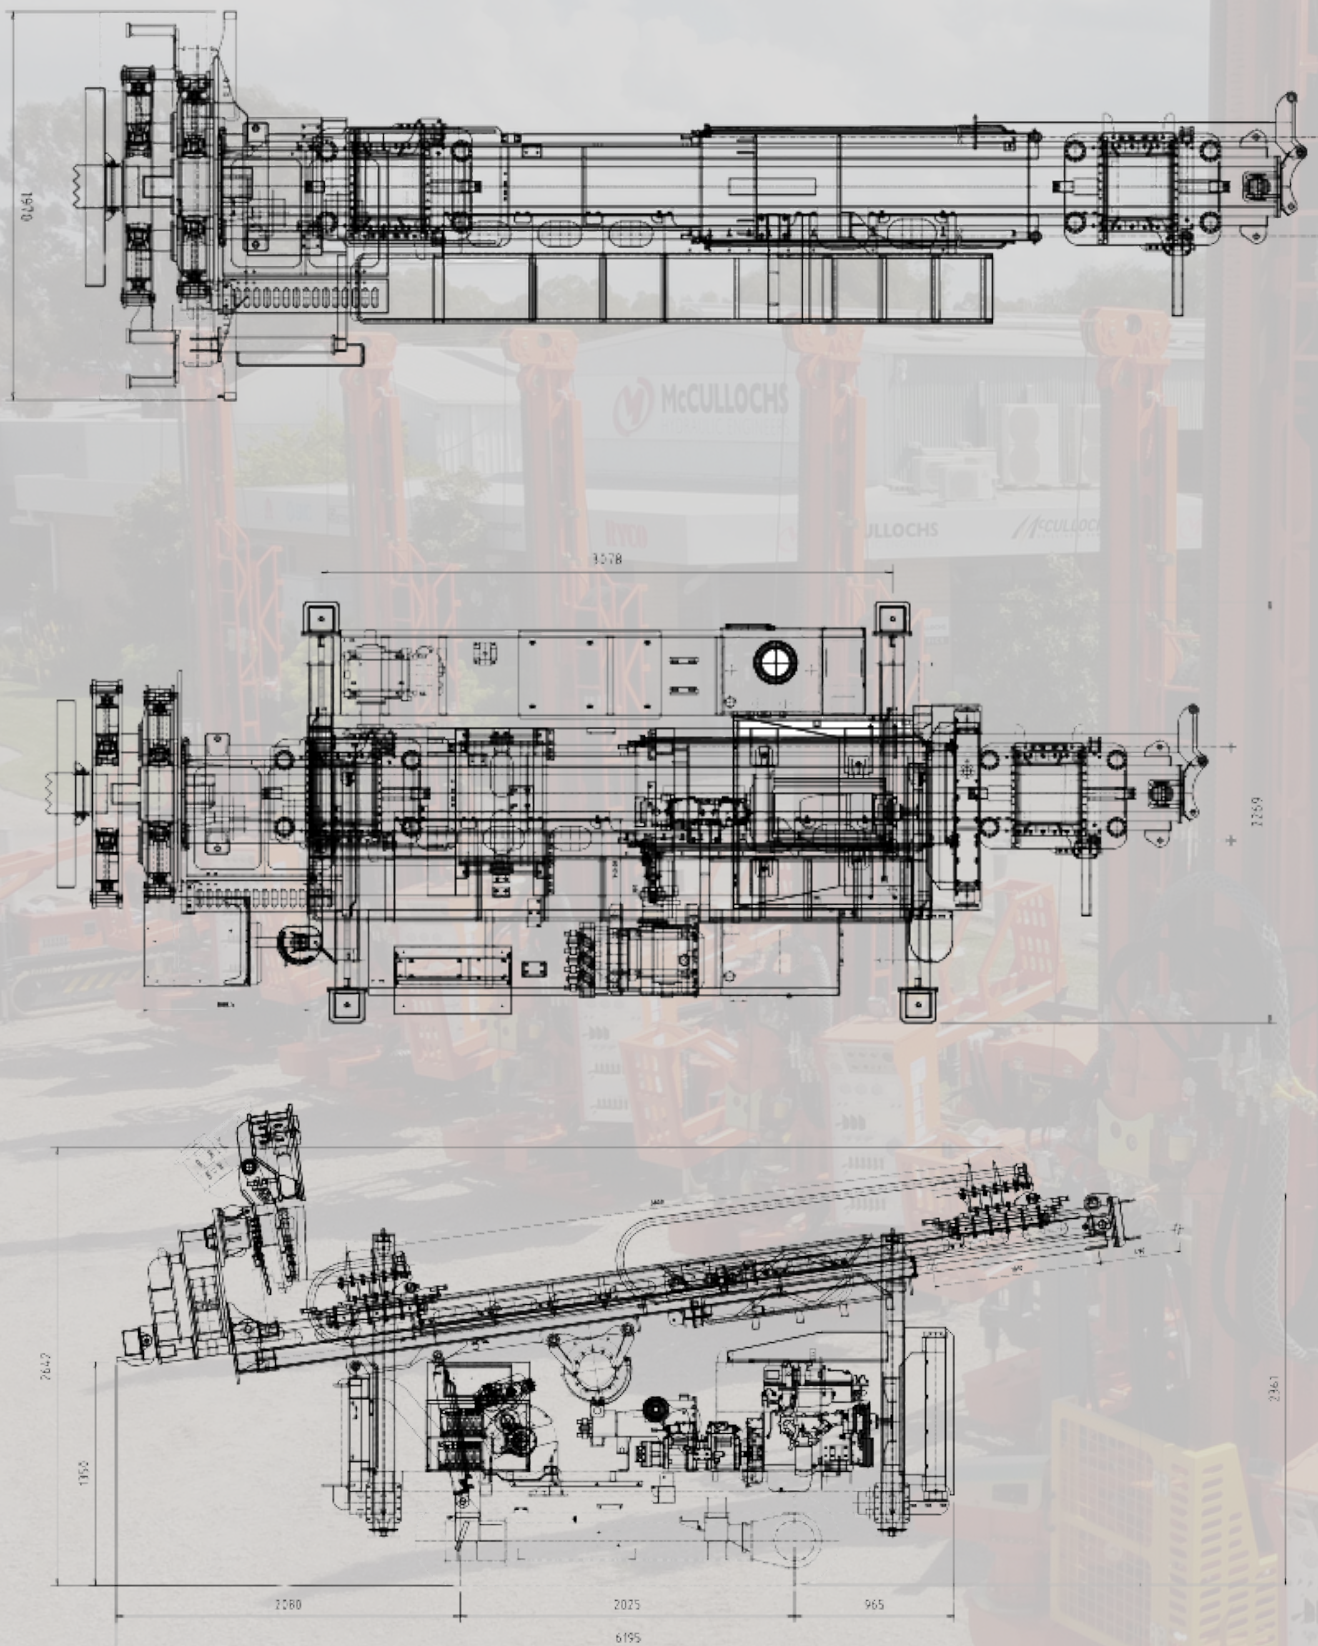

+61 3 5445 6900  
sales@mccullochs.com.au  
mccullochsdrilling.com.au